

6

5

4

3

2

1


ROHS Compliant

REV.	DESCRIPTION	DATA

D


D

PCB Layout

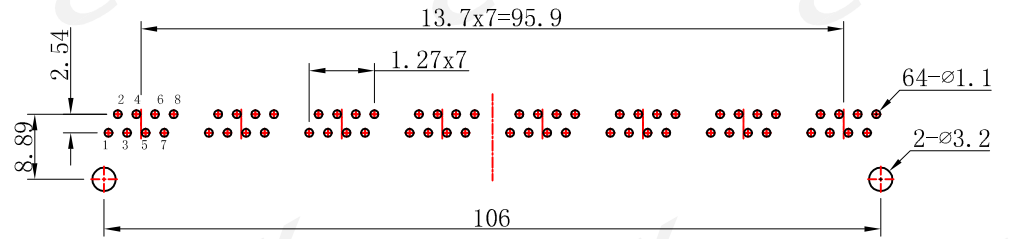




C

C

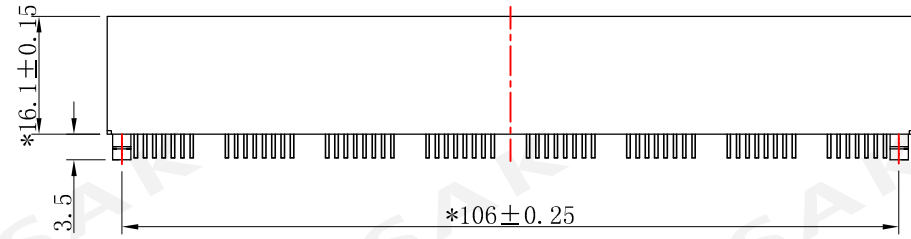

B

B

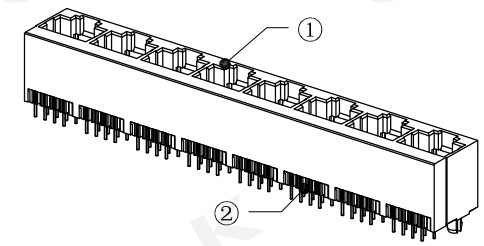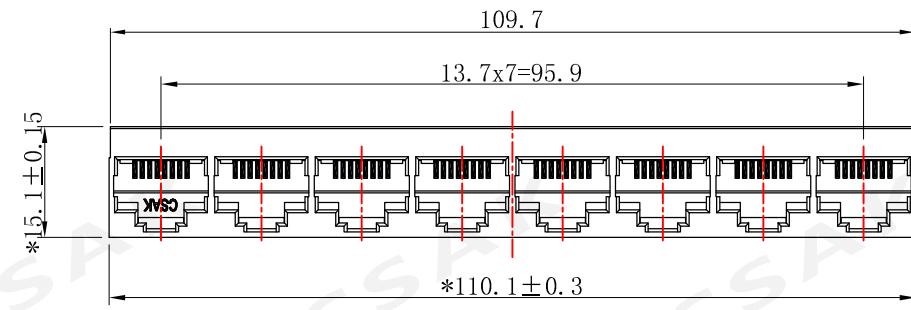

DESCRIPTION:

1. OPERATION TEMPERATURE RANGE: -40°C TO 85°C;
2. LOAD RATING: 125VAC, 1.5A;
3. CONTACT RESISTANCE: 30mΩ MAX;
4. INSULATION RESISTANCE: 1000MΩ MIN;
5. WITHSTAND VOLTAGE: 1000VAC 60S;
6. MECHANICAL ENDURANCE: 750 CYCLES MIN;
7. RECOMMENDED PCB THICKNESS: 1.6mm.

BOM

NO.	PART NAME	DWG NO.	Q' TY	DESCRIPTION
1	HOUSING	5218.50.001	1	PBT (Black)
2	INSERT	5212.20.001	8	Contact Material: phosphor bronze gold plating 0.5 μ", ø0.46mm

A

A

CSAK ELECTRONICS CO., LTD		DESC: RJ45 立式 1x8 8P8C PBT黑色	
TOLERANCES	PYPE	5218-88-100-001-01	DRAWING
0~6 : ±0.1	CUSTOMER		CHECK
6~30 : ±0.2	CUST P/N		APPROVED
30~120: ±0.3			
		P/N: 5218.10.001.011	
		UNIT	SCALE
		mm	1:1
		VIEW	REV.
			A0

6

5

4

3

2

1